

Created on: 18-05-2024 20:35:53 |
Technical changes and imperfections
reserved.

PRODUCT DATA SHEET Hiltru®: Emergency shower frost proof MB 200

Size Emergency shower frost proof MB 200

Article number	999999979
Material	Plastic outer jacket
Pipework	Galvanized
Operation	Stainless steel pull handle
Water flow	80 l/min. (2 Bar G)
Water supply	1¼" BSP internal thread
Nutrition	230 Volt suitable for Normal Zone.
Frost-free	to -30°

Specifications Emergency shower frost proof MB 200

Oog- en nooddouches voor industriële toepassing op locaties waar kans op bevriezing aanwezig is. Door het toepassen van (trace-tape) isolatie wordt hiervoor optimale bescherming geboden. Getoonde producten zijn toepasbaar binnen de PGS 15 regelgeving.

Features:

- Design according to ANSI Z 358.1 and CE EN 15154.
- Executed with galvanized or stainless steel piping in insulated plastic outer jacket.
- Suitable for outdoor use up to a temperature of -30°C.
- Pipework protected from frost by means of self-regulating heating ribbon.
- Body shower equipped with a special plastic shower head with 60° rotation for fast effective operation.
- Eyebath with double spray head placed in a impact resistant plastic container with a hinged lid.
- Eyebath equipped with perlators/diffusers for a pleasant, sparkling and oxygenated water spray.
- Delivery in package, assembly and connection must be provided by the client.
- Atex version on request.

Created on: 18-05-2024 20:35:53 |
Technical changes and imperfections
reserved.

PRODUCT DATA SHEET Hiltru®: Emergency shower frost-free MBS 200 (stainless steel)

Size Emergency shower frost-free MBS 200 (stainless steel)

Article number	999999979
Material	Plastic outer jacket
Pipework	RVS
Operation	Stainless steel pull handle
Water flow	80 l/min. (2 Bar G)
Water supply	1¼" BSP internal thread
Nutrition	230 Volt suitable for Normal Zone
Frost-free	Up to -30°

Specifications Emergency shower frost-free MBS 200 (stainless steel)

Oog- en nooddouches voor industriële toepassing op locaties waar kans op bevriezing aanwezig is. Door het toepassen van (trace-tape) isolatie wordt hiervoor optimale bescherming geboden. Getoonde producten zijn toepasbaar binnen de PGS 15 regelgeving.

Features:

- Design according to ANSI Z 358.1 and CE EN 15154.
- Executed with galvanized or stainless steel piping in insulated plastic outer jacket.
- Suitable for outdoor use up to a temperature of -30°C.
- Pipework protected from frost by means of self-regulating heating ribbon.
- Body shower equipped with a special plastic shower head with 60° rotation for fast effective operation.
- Eyebath with double spray head placed in a impact resistant plastic container with a hinged lid.
- Eyebath equipped with perlators/diffusers for a pleasant, sparkling and oxygenated water spray.
- Delivery in package, assembly and connection must be provided by the client.
- Atex version on request.

Created on: 18-05-2024 20:35:53 |
Technical changes and imperfections
reserved.

PRODUCT DATA SHEET Hiltru®: Eye wash MB50 OD

Size Eye wash MB50 OD

Article number	999999979
Material	Plastic eyebath
Pipework	Galvanized
Operation	Lid control
Water flow	12 litres/min (2 Bar)
Water inlet/standpipe	1¼" BSP internal thread
Nutrition	380 V/ 18 KW (IP66 cabinet)
Forwarding	Water temp. approx. 25 gr, IP 66

Specifications Eye wash MB50 OD


Oog- en nooddouches voor industriële toepassing op locaties waar kans op bevriezing aanwezig is. Door het toepassen van (trace-tape) isolatie wordt hiervoor optimale bescherming geboden. Getoonde producten zijn toepasbaar binnen de PGS 15 regelgeving.

Features:

- Design according to ANSI Z 358.1 and CE EN 15154.
- Executed with galvanized or stainless steel piping in insulated plastic outer jacket.
- Suitable for outdoor use up to a temperature of -30°C.
- Pipework protected from frost by means of self-regulating heating ribbon.
- Body shower equipped with a special plastic shower head with 60° rotation for fast effective operation.
- Eyebath with double spray head placed in a impact resistant plastic container with a hinged lid.
- Eyebath equipped with perlators/diffusers for a pleasant, sparkling and oxygenated water spray.
- Delivery in package, assembly and connection must be provided by the client.
- Atex version on request.

Created on: 18-05-2024 20:35:53 |
Technical changes and imperfections
reserved.

PRODUCT DATA SHEET Hiltru®: Eye wash MB 60

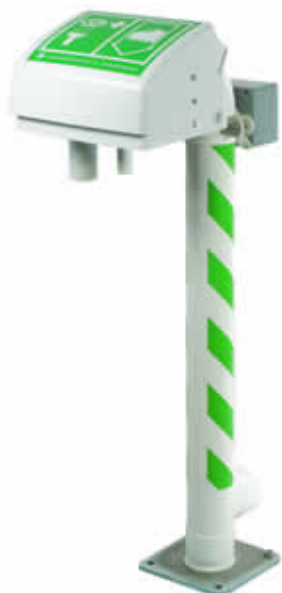

Size Eye wash MB 60

Article number	999999979
Material	Plastic eyebath and outer jacket
Pipework	Galvanized
Operation	Lid control
Water flow	12 l/min.
Water supply	1¼" BSP internal thread
Nutrition	230 Volt suitable for Normal Zone.
Frost-free	Up to -30°


Specifications Eye wash MB 60

Oog- en nooddouches voor industriële toepassing op locaties waar kans op bevriezing aanwezig is. Door het toepassen van (trace-tape) isolatie wordt hiervoor optimale bescherming geboden. Getoonde producten zijn toepasbaar binnen de PGS 15 regelgeving.

Features:

- Design according to ANSI Z 358.1 and CE EN 15154.
- Executed with galvanized or stainless steel piping in insulated plastic outer jacket.
- Suitable for outdoor use up to a temperature of -30°C.
- Pipework protected from frost by means of self-regulating heating ribbon.
- Body shower equipped with a special plastic shower head with 60° rotation for fast effective operation.
- Eyebath with double spray head placed in a impact resistant plastic container with a hinged lid.
- Eyebath equipped with perlators/diffusers for a pleasant, sparkling and oxygenated water spray.
- Delivery in package, assembly and connection must be provided by the client.
- Atex version on request.

Created on: 18-05-2024 20:35:53 |
Technical changes and imperfections
reserved.

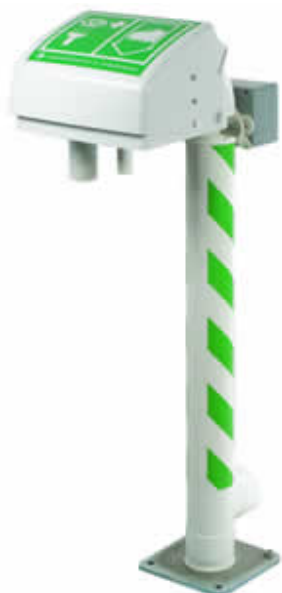PRODUCT DATA SHEET Hiltru®: Eye wash MBS 60 (stainless steel)

Size Eye wash MBS 60 (stainless steel)

Article number	999999979
Material	Plastic eyebath and outer jacket
Pipework	RVS
Operation	Lid control
Water flow	12 l/min.
Water supply	1¼" BSP internal thread
Nutrition	230 Volt suitable for Normal Zone
Frost-free	Up to -30°

Specifications Eye wash MBS 60 (stainless steel)

Oog- en nooddouches voor industriële toepassing op locaties waar kans op bevriezing aanwezig is. Door het toepassen van (trace-tape) isolatie wordt hiervoor optimale bescherming geboden. Getoonde producten zijn toepasbaar binnen de PGS 15 regelgeving.

Features:

- Design according to ANSI Z 358.1 and CE EN 15154.
- Executed with galvanized or stainless steel piping in insulated plastic outer jacket.
- Suitable for outdoor use up to a temperature of -30°C.
- Pipework protected from frost by means of self-regulating heating ribbon.
- Body shower equipped with a special plastic shower head with 60° rotation for fast effective operation.
- Eyebath with double spray head placed in a impact resistant plastic container with a hinged lid.
- Eyebath equipped with perlators/diffusers for a pleasant, sparkling and oxygenated water spray.
- Delivery in package, assembly and connection must be provided by the client.
- Atex version on request.

Created on: 18-05-2024 20:35:53 |
Technical changes and imperfections
reserved.

PRODUCT DATA SHEET Hiltra®: Eye and emergency shower frost free MB250

Size Eye and emergency shower frost free MB250

Article number	999999979
Material	Plastic outer jacket and shower head
Pipework	Galvanized
Operation	Stainless steel pull handle
Water flow	80 l/min.
Water supply	1¼" BSP internal thread
Nutrition	230 Volt suitable for Normal Zone
Frost-free	Up to -30°

Specifications Eye and emergency shower frost free MB250

Oog- en nooddouches voor industriële toepassing op locaties waar kans op bevriezing aanwezig is. Door het toepassen van (trace-tape) isolatie wordt hiervoor optimale bescherming geboden. Getoonde producten zijn toepasbaar binnen de PGS 15 regelgeving.

Features:

- Design according to ANSI Z 358.1 and CE EN 15154.
- Executed with galvanized or stainless steel piping in insulated plastic outer jacket.
- Suitable for outdoor use up to a temperature of -30°C.
- Pipework protected from frost by means of self-regulating heating ribbon.
- Body shower equipped with a special plastic shower head with 60° rotation for fast effective operation.
- Eyebath with double spray head placed in a impact resistant plastic container with a hinged lid.
- Eyebath equipped with perlators/diffusers for a pleasant, sparkling and oxygenated water spray.
- Delivery in package, assembly and connection must be provided by the client.
- Atex version on request.

Created on: 18-05-2024 20:35:53 |
Technical changes and imperfections
reserved.

PRODUCT DATA SHEET Hiltra®: Eye and emergency shower frost-free MBS 250 (stainless steel)

Size Eye and emergency shower frost-free MBS 250
(stainless steel)

Article number	999999979
Material	Plastic outer jacket
Piping	STAINLESS STEEL
Operation	stainless steel pull handle
Water yield	80 ltr/min.
Water supply	1¼" BSP internal thread
Nutrition	230 Volt suitable for Normal Zone
Frost-free	Up to -30°

Specifications Eye and emergency shower frost-free MBS 250 (stainless steel)

Oog- en nooddouches voor industriële toepassing op locaties waar kans op bevriezing aanwezig is. Door het toepassen van (trace-tape) isolatie wordt hiervoor optimale bescherming geboden. Getoonde producten zijn toepasbaar binnen de PGS 15 regelgeving.

Features:

- Design according to ANSI Z 358.1 and CE EN 15154.
- Executed with galvanized or stainless steel piping in insulated plastic outer jacket.
- Suitable for outdoor use up to a temperature of -30°C.
- Pipework protected from frost by means of self-regulating heating ribbon.
- Body shower equipped with a special plastic shower head with 60° rotation for fast effective operation.
- Eyebath with double spray head placed in a impact resistant plastic container with a hinged lid.
- Eyebath equipped with perlators/diffusers for a pleasant, sparkling and oxygenated water spray.
- Delivery in package, assembly and connection must be provided by the client.
- Atex version on request.

Created on: 18-05-2024 20:35:53 |
Technical changes and imperfections
reserved.

PRODUCT DATA SHEET Hiltra®: Eye and emergency shower MD 250-50 (-15°)



Size Eye and emergency shower MD 250-50 (-15°)

Article number	999999979
Material	Plastic eyebath, outer jacket and shower head
Pipework	Galvanized
Operation	Shower stainless steel pull handle, Eyebath lid control
Water flow	Shower 80 ltr/min, bath 12 ltr/min.
Water supply	1¼" BSP internal thread
Nutrition	230 Volt, suitable for normal zone
Frost-free	Up to -15°.

Specifications Eye and emergency shower MD 250-50 (-15°)

Oog- en nooddouches voor industriële toepassing op locaties waar kans op bevriezing aanwezig is. Door het toepassen van (trace-tape) isolatie wordt hiervoor optimale bescherming geboden. Getoonde producten zijn toepasbaar binnen de PGS 15 regelgeving.

Features:

- Design according to ANSI Z 358.1 and CE EN 15154.
- Executed with galvanized or stainless steel piping in insulated plastic outer jacket.
- Suitable for outdoor use up to a temperature of -30°C.
- Pipework protected from frost by means of self-regulating heating ribbon.
- Body shower equipped with a special plastic shower head with 60° rotation for fast effective operation.
- Eyebath with double spray head placed in a impact resistant plastic container with a hinged lid.
- Eyebath equipped with perlaters/diffusers for a pleasant, sparkling and oxygenated water spray.
- Delivery in package, assembly and connection must be provided by the client.
- Atex version on request.

Created on: 18-05-2024 20:35:53 |
Technical changes and imperfections
reserved.

PRODUCT DATA SHEET Hiltra®: Eye and emergency shower MDS 250-50 -RVS (-15°)



Size Eye and emergency shower MDS 250-50 -RVS (-15°)

Article number	999999979
Material	Plastic eyebath, outer jacket and shower head
Pipework	RVS
Operation	Shower stainless steel pull handle, Eyebath lid control
Water flow	Shower 80 ltr/min, bath 12 ltr/min.
Water supply	1½" BSP internal thread
Nutrition	230 Volt, suitable for normal zone
Frost-free	Up to -15°.

Specifications Eye and emergency shower MDS 250-50 -RVS (-15°)

Oog- en nooddouches voor industriële toepassing op locaties waar kans op bevriezing aanwezig is. Door het toepassen van (trace-tape) isolatie wordt hiervoor optimale bescherming geboden. Getoonde producten zijn toepasbaar binnen de PGS 15 regelgeving.

Features:

- Design according to ANSI Z 358.1 and CE EN 15154.
- Executed with galvanized or stainless steel piping in insulated plastic outer jacket.
- Suitable for outdoor use up to a temperature of -30°C.
- Pipework protected from frost by means of self-regulating heating ribbon.
- Body shower equipped with a special plastic shower head with 60° rotation for fast effective operation.
- Eyebath with double spray head placed in a impact resistant plastic container with a hinged lid.
- Eyebath equipped with perlaters/diffusers for a pleasant, sparkling and oxygenated water spray.
- Delivery in package, assembly and connection must be provided by the client.
- Atex version on request.

Created on: 18-05-2024 20:35:53 |
Technical changes and imperfections
reserved.

PRODUCT DATA SHEET Hiltra®: Eye and emergency shower MB 250-50 (-30°)

Size Eye and emergency shower MB 250-50 (-30°)

Article number	999999979
Material	Plastic eye bath, outer jacket and shower head
Piping	Galvanized
Operation	Shower stainless steel pull handle, Eye bath lid control
Water yield	Shower 80 ltr/min, Bath 12 ltr/min.
Water supply	1¼" BSP internal thread
Nutrition	230 Volt suitable for Normal Zone
Frost-free	Up to -30°

Specifications Eye and emergency shower MB 250-50 (-30°)

Oog- en nooddouches voor industriële toepassing op locaties waar kans op bevriezing aanwezig is. Door het toepassen van (trace-tape) isolatie wordt hiervoor optimale bescherming geboden. Getoonde producten zijn toepasbaar binnen de PGS 15 regelgeving.

Features:

- Design according to ANSI Z 358.1 and CE EN 15154.
- Executed with galvanized or stainless steel piping in insulated plastic outer jacket.
- Suitable for outdoor use up to a temperature of -30°C.
- Pipework protected from frost by means of self-regulating heating ribbon.
- Body shower equipped with a special plastic shower head with 60° rotation for fast effective operation.
- Eyebath with double spray head placed in a impact resistant plastic container with a hinged lid.
- Eyebath equipped with perlaters/diffusers for a pleasant, sparkling and oxygenated water spray.
- Delivery in package, assembly and connection must be provided by the client.
- Atex version on request.

Created on: 18-05-2024 20:35:53 |
Technical changes and imperfections
reserved.

PRODUCT DATA SHEET Hiltru®: Eye and emergency shower MBS 250-50 -RVS (-30°)

Size Eye and emergency shower MBS 250-50 -RVS (-30°)

Article number	999999979
Material	Eye bath and outer jacket and shower head made of plastic
Piping	STAINLESS STEEL
Operation	Shower stainless steel pull handle. Eye bath lid control
Water yield	Shower 80 ltr/min, Bath 12 ltr/min.
Water supply	1¼" BSP internal thread
Nutrition	230 Volt suitable for Normal Zone
Frost-free	Up to -30°

Specifications Eye and emergency shower MBS 250-50 -RVS (-30°)

Oog- en nooddouches voor industriële toepassing op locaties waar kans op bevriezing aanwezig is. Door het toepassen van (trace-tape) isolatie wordt hiervoor optimale bescherming geboden. Getoonde producten zijn toepasbaar binnen de PGS 15 regelgeving.

Features:

- Design according to ANSI Z 358.1 and CE EN 15154.
- Executed with galvanized or stainless steel piping in insulated plastic outer jacket.
- Suitable for outdoor use up to a temperature of -30°C.
- Pipework protected from frost by means of self-regulating heating ribbon.
- Body shower equipped with a special plastic shower head with 60° rotation for fast effective operation.
- Eyebath with double spray head placed in a impact resistant plastic container with a hinged lid.
- Eyebath equipped with perlators/diffusers for a pleasant, sparkling and oxygenated water spray.
- Delivery in package, assembly and connection must be provided by the client.
- Atex version on request.