

Created on: 08-05-2024 16:05:03 |
Technical changes and imperfections
reserved.

PRODUCT DATA SHEET Hiltru®: Eye wash model MB30 DDM

Size Eye wash model MB30 DDM

Article number	999999979
Material	Stainless steel bath, chrome plated brass nozzles
Pipework	Galvanized
Operation	Stainless steel push handle
Water flow	12 l/min. (2 Bar G)
Water supply	15 mm compression fitting, ½" BSP external thread
Wall mounting	Robust stainless steel wall bracket

Specifications Eye wash model MB30 DDM

Eyebaths and emergency showers for industrial application for outhouse use and for mounting on an (outside) wall. The emergency shower drains automatically after use! The valve is located at the inside of the wall (where there is no danger of frost) and the operation at the outside of the wall. Because of this principle the emergency shower is frost proof! Products shown are applicable within the PGS 15 regulations.

Features:

- Design according to ANSI Z 358.1 and CE EN 15154.
- Suitable for outdoor use (wall mounting).
- Eye showers equipped with perlators/diffusers for a pleasant, sparkling and oxygenated water spray.
- Perlators/diffusers fitted with dust caps.
- Bowl eyebath in stainless steel.
- Delivery in package, assembly by client.

Created on: 08-05-2024 16:05:03 |
Technical changes and imperfections
reserved.

PRODUCT DATA SHEET Hiltru®: Eye wash model MBS30 DDM (stainless steel)

Size Eye wash model MBS30 DDM (stainless steel)

Article number	999999979
Material	Stainless steel bath, chrome plated brass nozzles
Pipework	RVS
Operation	Stainless steel push handle
Water flow	12 l/min. (2 Bar G)
Water supply	15 mm compression fitting, ½" BSP external thread
Wall mounting	Robust stainless steel wall bracket

Specifications Eye wash model MBS30 DDM (stainless steel)


Eyebaths and emergency showers for industrial application for outhouse use and for mounting on an (outside) wall. The emergency shower drains automatically after use! The valve is located at the inside of the wall (where there is no danger of frost) and the operation at the outside of the wall. Because of this principle the emergency shower is frost proof! Products shown are applicable within the PGS 15 regulations.

Features:

- Design according to ANSI Z 358.1 and CE EN 15154.
- Suitable for outdoor use (wall mounting).
- Eye showers equipped with perlators/diffusers for a pleasant, sparkling and oxygenated water spray.
- Perlators/diffusers fitted with dust caps.
- Bowl eyebath in stainless steel.
- Delivery in package, assembly by client.

Created on: 08-05-2024 16:05:03 |
Technical changes and imperfections
reserved.

PRODUCT DATA SHEET Hiltru®: Emergency shower MB100 DDM

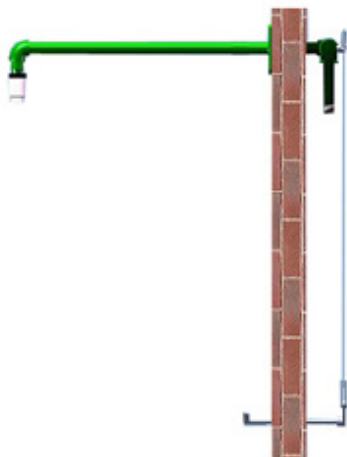

Size Emergency shower MB100 DDM

Article number	999999979
Material	Steel with a plastic shower head
Pipework	Galvanized
Operation	Stainless steel push handle
Water flow	80 l/min. (2 Bar G)
Water supply	1" BSP internal thread
Wall mounting	Galvanized wall plate


Specifications Emergency shower MB100 DDM

Eyebaths and emergency showers for industrial application for outhouse use and for mounting on an (outside) wall. The emergency shower drains automatically after use! The valve is located at the inside of the wall (where there is no danger of frost) and the operation at the outside of the wall. Because of this principle the emergency shower is frost proof! Products shown are applicable within the PGS 15 regulations.

Features:

- Design according to ANSI Z 358.1 and CE EN 15154.
- Suitable for outdoor use (wall mounting).
- Eye showers equipped with perlators/diffusers for a pleasant, sparkling and oxygenated water spray.
- Perlators/diffusers fitted with dust caps.
- Bowl eyebath in stainless steel.
- Delivery in package, assembly by client.

Created on: 08-05-2024 16:05:03 |
Technical changes and imperfections
reserved.

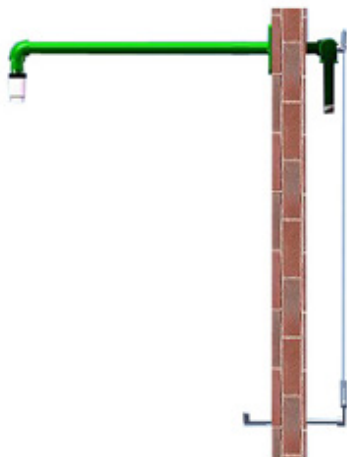PRODUCT DATA SHEET Hiltru®: Emergency shower MBS100 DDM

Size Emergency shower MBS100 DDM

Article number	999999979
Material	Steel with a plastic shower head
Pipework	RVS
Operation	Stainless steel push handle
Water flow	80 l/min. (2 Bar G)
Water supply	1" BSP internal thread
Wall mounting	Stainless steel wall plate

Specifications Emergency shower MBS100 DDM

Eyebaths and emergency showers for industrial application for outhouse use and for mounting on an (outside) wall. The emergency shower drains automatically after use! The valve is located at the inside of the wall (where there is no danger of frost) and the operation at the outside of the wall. Because of this principle the emergency shower is frost proof! Products shown are applicable within the PGS 15 regulations.

Features:

- Design according to ANSI Z 358.1 and CE EN 15154.
- Suitable for outdoor use (wall mounting).
- Eye showers equipped with perlators/diffusers for a pleasant, sparkling and oxygenated water spray.
- Perlators/diffusers fitted with dust caps.
- Bowl eyebath in stainless steel.
- Delivery in package, assembly by client.